

()

INTERSTATE COUNCIL FOR STANDARDIZATION, METROLOGY AND CERTIFICATION
(ISC)

ISO 9612- 2016

**(ISO 9612:2009, Acoustics — Determination of occupational noise exposure —
Engineering method, IDT)**


1.0—2015 «
 1.2—2015 «
 1
 2
 3
 49 28 2016 .)
 :

{ 3166) 004-97	(3166)004—97	
	AM KG RU	

4 2016 . N9 1481- ISO 9612—2016 21
 1 2017 .
 5 ISO 9612:2009 «
 noise exposure — Engineering method». IDT).
 ISO/TC 43 «
 1.5 (3.6).
 6 9612—2013
 7 12.1.050—86
 « « », ()
 « ».

(wmv.gosf.ru)

1	1	
2	2	
3	2	
4	4	
5	5	
6	6	
7	7	
8	8	
9	8	
10	11	
11	13	
12	14	
13	16	
14	17	
15	18	
	() ,	20
	()	21
	()	24
D()	8-	31
	() 8-	34
F()	8-	36
	()	38
	39



Acoustics. Noise measurement for the purpose of evaluating human exposure to noise. Method of measurements at workplaces

—2017—09—01

1

8-

$L_{Aeq,T}$

2>

L_p (.3.4).

31.5 8000

t-EX&tr
«

IEC 61260:1995

» (17168—62 «
»).

(12.1.050—86

« 8-

».

2

ISO 1999 Acoustics — Determination of occupational noise exposure and estimation of noise-induced hearing impairment ()

ISO/IEC Guide 98-3 Uncertainty of measurement — Part 3: Guide to the expression of uncertainty in measurement (GUM:199S) (3.)

IEC 60942:2003 Electroacoustics — Sound calibrators ()

IEC 61252 Electroacoustics — Specifications for personal sound exposure meters ()

IEC 61672-1 Electroacoustics — Sound level meters — Part 1: Specifications (1.)

3

3.1 L_{pAeqT} (-weighted equivalent continuous sound pressure level).
 (, f_2 , p_0 ($p_0 =$ 20))

$$L_{p,A,eqT} = 10 \lg \left| \frac{\frac{1}{T} \int_{t_1}^{t_2} p_A^2(t) dt}{p_0^2} \right| \quad (1)$$

3.2 $L_{EX,8h}$ (daily noise exposure level).
 [9].

$$L_{EX,8h} = L_{p,A,eqT_8} + 10 \lg \left[\frac{T_8}{T_0} \right] \quad (2)$$

L_{pAwT} ()
 (. . . , :)
), ; ($T_0 = 8$).

*- $L_{EX,8h} = L_{pAe} * 8$ -
 1 — (. . . 8) .
 2 — X
 8- , ,

$$\bar{L}_{EX,8h} = 10 \lg \left[\frac{1}{X} \sum_{x=1}^X 10^{0.1 \cdot L_{EX,8h,x}} \right]$$

17187—2010 « 1. » « - » « ».

X , X = 5
8-

3— [9].
3.3 () (nominal day): -

1 — -
(. 7.3). () -

2 — -


3.4 (C-weighted peak sound pressure level).
 $L_{p, Cpt/Bk}$

$$L_{p, Cpeak} = 10 \lg \left(\frac{P_{peak}}{P_0} \right) \quad (4)$$

3.5 () (task):

— 1 -
3.6 (job): -

1 — (, « , »).
2— 1

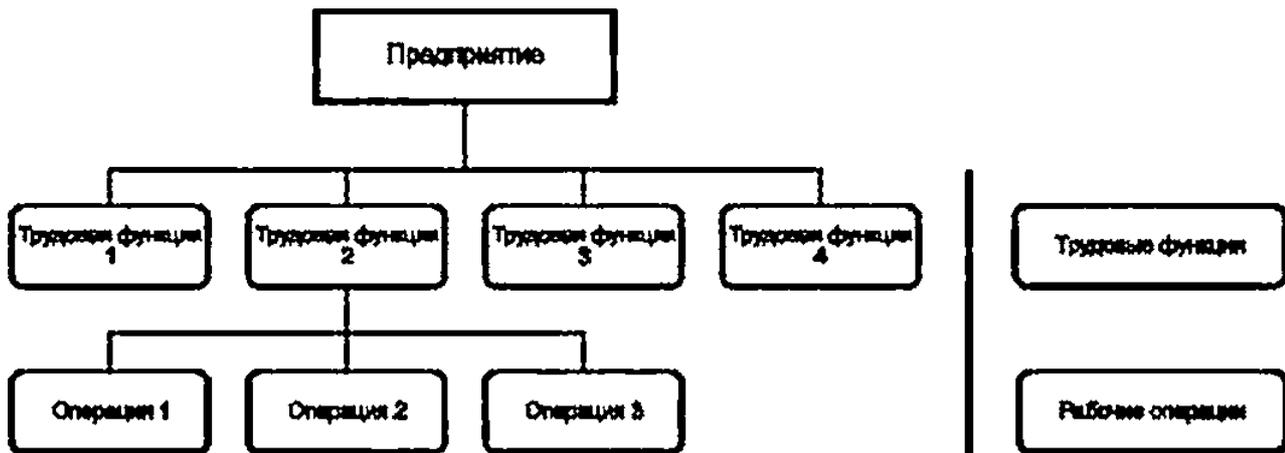

1— : 1— , 2— : 3— :
4— : 2— : 3—
1—

4

		—
		—
»		—
1 »	m-	'1
2		—
↔3		—
1		—
!		—
i		—
J		—
		—
*) (. 2 ..	-
<i>LEX.Vi</i>	8-	
<i>LEX.th</i>	8-	
<i>LEX.to.tn</i>	m- 8-	
<i>^V-A.oqT.m</i>	m-	
<i>^pAepT</i>		
<i>^~pAeqTjn</i>		
<i>^pAeffTjn</i>		-
^	-	-
<i>^pAeffT_e</i>		
<i>^p.C£eafc</i>	-	
m		—
M		—
n		—
W		—
"<?		—

	(0 »2*10 ⁻⁵)	
	,	
*	,	
0 ₂	,	
	,	
1	(. 2)	
	,	
	(»8)	
*		
	j- m-	
	-	
V		
	r-	
	,	
	,	-
^u A.m	m-	-
^u i.b.m		/ - -
2.	m-	
o	,	
x		—
x		—

5

5.1

1 2 (61672*1.

1

IEC 61252.

6.5 5. L_{EXSh} (. 9.
 10.11) (.), -
 — 15. 8 D. F

7

7.1

.8 :

- a) , , -
 - b) (.72); ;) , -
 - c) ;
 - d) () ,
 - e) ;
 - 0 ;
 -) .
- , , , (, , -
), , -
 (8- , -
) .
- , -

7.2

, , , (, , -
) .

, , , , , -
 , . -

() .
 (.10.4).

7.3

, , , , , , -
 , (. ,) .

;

) () -

:

7

b) ; , -

c) (.) -

d) ; -

. -

, -

, -

. -

(,) , -

(. 3.2 3.3). -

. -

, -

, -

(. ISO 1999). -

8

8.1

, ; -

; -

; -

8.2

a) , ; -

(. 9): -

b) (. 10); -

c) (. 11). -

8.

9

9.1

, -

, -

, -

, -

, -

$$L_p^{\wedge} L_p$$

9.2

- a)
- b)
- c)

one*

J

$$-1$$

(5)

$$-1$$

(6)

m-

9.3

$$L_{pAcqTm}$$

$$L_{pAeqTm} \quad (12).$$

5

1).

5

(2. 2).

S

(2. 3).


$$L_p$$

3

- a)
- b)
- c)

9.2 9.3:

9.3,

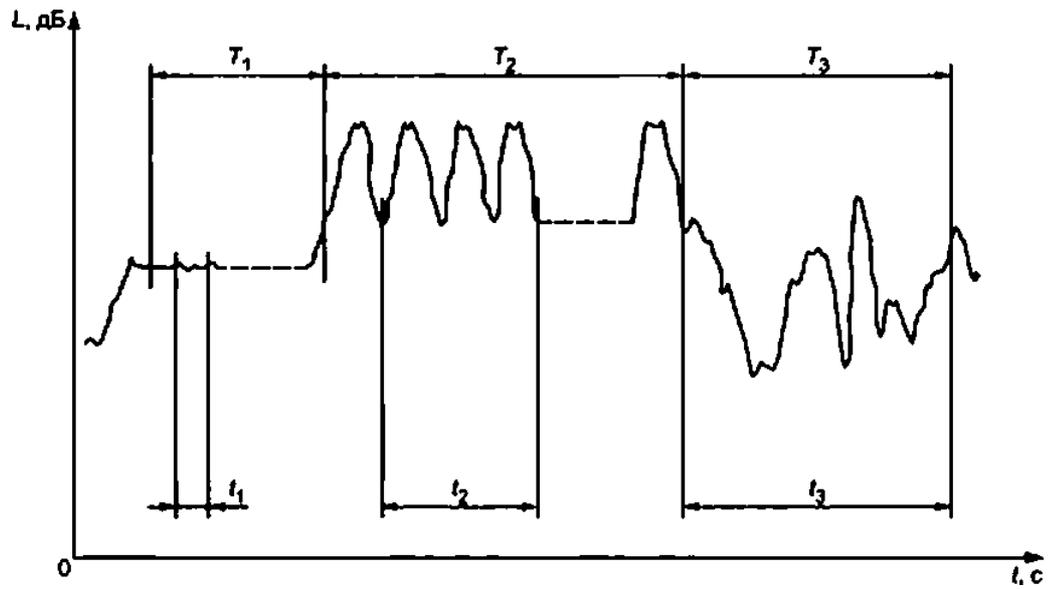

L — $2: \quad 3 \quad w$ $1: \quad 2$ —
 $2(\quad)$ — $1(\quad)$ $\leq 2^m$ (\quad) $3: J$ — (\quad)

2—

/

L_p $сq7m$

(7)

L_{pA}

1 :
/—
/—

m-

/-

L_{pAcqTm}

2()

9.4

8-

8-

9.5.

8-

8) , -

$$L_{EX,8h,m} = L_{pA,eqT,m} + 10 \lg \left(\frac{\bar{T}_m}{T_0} \right), \quad (8)$$

$L_{p \ 9}$ —

m-

(7);

(5):

9.5

8-

8-

[. (9) (10)].

(7) (5)

8-

$$L_{EX,8h} = 10 \lg \left(\sum_{m=1}^M \frac{\bar{T}_m}{T_0} 10^{0,1 \cdot L_{pA,eqT,m}} \right), \quad (9)$$

$L_{p \ 9}$ —

m-

(5) :

0—

8 :

—

8-

—

8-

9.4

(8).

8-

L_{exih} ,

$$L_{EX,8h} = 10 \lg \left(\sum_{m=1}^M 10^{0,1 \cdot L_{EX,8h,m}} \right), \quad (10)$$

$L_{ex \ 8hm}$ —

8-

;

—

;

—

8-

10

10.1

L_{pAeqT}

10.2

(.7.2).

8-

)

1

n_G

;

- b) / L_{pA} (/ 2 5) ;
- c) . *

8 1 —

5	5
5 15	$5 + (-5) * 0,5$
15 40	$+ (-15) * 0,25$
40	17*
*	-

- 1) 5.5 (1);
- 2) 10.
- 33 ;
- 3) ,
- 4) 5):
- 4) ,
- 5) :

10.3

12.

10.4

8-

L_{oA} 9 .

V -1 } **on**

L_{pA} 7 — ;

N— .

8-

$$= V \cdot e \cdot j T_e \quad (12)$$

L_p (? —

L_p 9qT . .

—
0—

8 .

. () .

.4 (), 3,5 ” .

N.

11

11.1

, , (

13).

— , « » (. , /

11.2

a)

b)

c)

d)

(. 9): (,)

11.3

L_p p<T .

12.

3 .

(, N) .

(11)

() 3

11.4 8- 8- $L_{EX,8h} = L_{p,A,eqT_0} + 10 \lg \left(\frac{T_s}{T_0} \right)$ (13)

$L_{pA_{0<tT}}$ $i_{pA_{qT_0}}$ 11.3: 8 . 4() .

12

12.1 a) (. 5.1):
 b)

12.2

1 no IEC 60942:2003.

0.5
 12.3 0.04 0.1
 (. 13.2).

1 —

2 —

12.4

« »{ }.

0.1 0.4

0.4

a)

—

{ .[2]—[6]):
{1.55 ± 0.08}

b)

—

(0,80 ± 0.05)

$L(f)$.

$L(f)$

12.3.

)

(

(

),

[7] (8).

13

13.1

(

),

:

a)

b)

c)

d)

e)

f)

() ,

),

).

) —).

f).

15

- a)
 - 1) ;
 - 2) (-
 -);
 - 3) , ;
 - 4) :
 - 5) ;
- b)
 - 1) :
 - 2) () ;
 - 3) , ;
 - 4) (()) ;
- c)
 - 1) (, , -
 -):
 - 2) (,
 - . .):
 - 3) ;
 - 4) ;
- d)
 - 1) () ;
 - 2) ;
 - 3) (-
 -);
 - 4) , , -
 - ;
 - 5) ;
 - 6) , (-
 -);
 - 7) ,
 - :
 - 8) , -
 - :
 - 9) , (-
 - , . .);
 - 10) (, , -
 - 11) () (, , -
 - 12) ;
 - 13) ;
 - 14) (-
 - 15) ($L_{pA} eqT$,

-)
- 1) L_p A $L_{pA0<IT}$, -
 - ;
 - 2) L_{ex8h} ();
 - 3) 8- L_{ex6h} ()
 - (L_p) ;
 - 4) L_{cx} , -
(), ()
8-)

()

,

:

•

-

()

-

•

-

()

•

()

•

•

•

•

•

•

(,):

•

•

.4.2

.4.3

.4.4

.5

8-

(), 8

.6

.7

.1

1q .1 —

		—	—
	*		
	—		
	—		
	—		
of *			

()

.1

8- (£ * > L_{pA}
ISO/IEC Guide 98-3.

(. 13).

.1.

.1 — 8-

		9	
		1	.2
		1	.2
		1	.
		2	.5
		3	.6
),)) 13.1. d.) f) 13.1.			
*			

.1

8

.2 . .

1 —

L_{pCpook}

$L_p 6$ (- > -

8-

(.2) (.8) ISO/IEC Guide 98-3]

u_t

(.1)

$$U = \dots$$

(£ & , ± U-

95 %

=1.65. () ^+ U.

95 %

ISO/IEC Guide 98-3.

(141.

.2
.2.1

8-

$$\frac{\sigma}{\mu} = 10^{0,4} \cdot 9^{*m} \quad (2)$$

7q — ;
— ;
— ;

1- eqT.m—

[. (7)] m- :

Oj—
O3—

$$(9). \quad Q_2 \quad Q_3 \quad *(- \quad - \quad (2)$$

.2.2

Le*
ISO/IEC Guide 98-3

((-£) 8- -

$$*(\wedge \text{£}) \left\{ \sum_{m=1}^M [c_{10,m}^2 (u_{10,m}^2 + 2/ :16 \ 1 \ 16 \ }^2] \right\} \quad (.)$$

, ? — (. .2.3); m- -

O_{fem} — (. .2.3): m- -

^ —

m- :

1 ? \ 3 —

— ;
— ;
— ;

1 — L_A (. . . 2.1) —
 $1 \dots 2 = 3 m = C_{em}$ (.) C_{Um} 2 3 ,
 2 —

2.

2—

		1/			/»,,
Δp_{AepTju}	($L_{flAeQTm}$	1 (.6)		1, m- (.4)	1* , - -
	m-	$u_{ib m}$ (.7)		1 - (.5)	1 » 1 ,« - -
02	0	uZm (- .5)		= »	$\varphi_{am} \sqrt{2jn}$
	0	3 (. .)		3. = »	
* , Q_3 1.0 0.5 . , $Q_3 = 0.$ 3					

2.3

:

$$\leq \dots = 7 \wedge_{10}^{-1} (4\#>. , \ll * -1 . .) < .4>$$

$$\bullet > 4.34, \bullet (.5)$$

1 . m-

$$\wedge . = \sqrt{\frac{1}{l(l-1)} \left[\sum_{i=1}^l (\dots \gg ! 'p.Ao^{\wedge Tj} h)^2 \right]} < .6>$$

—

$$\dots \wedge = jt.L <> A. \langle > Tj \rangle r$$

i—
/—

1 . ()

$$u_{10,m} = \sqrt{\frac{1}{J(J-1)} \left[\sum_{j=1}^J (T_{m,j} - T_m)^2 \right]} \quad (.7)$$

j—
J—

$$u_1 = 0.5(7^{\wedge} - 7_{,,})$$

.3.1

$$L_{EX,8h} = 10 \lg \frac{T_0}{T_0} \left(\frac{1}{N} \sum_{n=1}^N 10^{0.1 \cdot L_{p,A,eqT,n}} \right), \quad (.8)$$

0—

N—

* . eqT.n—

$L_{pA}^{\wedge 1}$

0₂—

3—

(11) (12).

0₂

0₃

L_p

(.8)

.3.2

{-£ . <
ISO/IEC Guide 98-3
(. .)

((-£)

8-

$$= c_1^2 u_1^2 + c_2^2 (u_2^2 + u_3^2). \quad (.9)$$

.3.3

N

1-

.4

2

3.

$$c_2 = 1, \quad (.10)$$

$$c_3 = 1. \quad (.11)$$

		*	*	/	cf_t
\wedge	()	"	(.12)		CJU(. .4)
02	0	$U_2\{$.5)	$_2=1$	$^{\circ}2$
»	0	(.	.6)	$_3=1$	$^{\circ}3$
$0_3=0.$					
$1.0 \quad 0.5$					

$1/18$

.4

()

L_p

.4 —

CJU,

N

N	^ ^ .											
	0.5	1	1.5	2	2.5	3	3.6	4	4.5	5	5.6	5
3	0.6	1.6	3.1	5.2	8.0	11.5	15.7	20.6	26.1	32.2	39.0	46.5
4	0.4	0.9	1.6	2.5	3.6	5.0	6.7	8.8	10.9	13.4	16.1	19.2
5	0.3	0.7	1.2	1.7	2.4	3.3	4.4	5.6	6.9	8.5	10.2	12.1
6	0.3	0.6	0.9	1.4	1.9	2.6	3.3	4.2	5.2	6.3	7.6	8.9
7	0.2	0.5	0.8	1.2	1.6	2.2	2.8	3.5	4.3	5.1	6.1	7.2
8	0.2	0.5	0.7	1.1	1.4	1.9	2.4	3.0	3.6	4.4	5.2	6.1
9	0.2	0.4	0.7	1.0	1.3	1.7	2.1	2.6	3.2	3.9	4.6	5.4
10	0.2	0.4	0.6	0.9	1.2	1.5	1.9	2.4	2.9	3.5	4.1	4.8
12	0.2	0.3	0.5	0.8	1.0	1.3	1.7	2.0	2.5	2.9	3.5	4.0
14	0.1	0.3	0.5	0.7	0.9	1.2	1.5	1.8	2.2	2.6	3.0	3.5
16	0.1	0.3	0.5	0.6	0.8	1.1	1.3	1.6	2.0	2.3	2.7	3.2
16	0.1	0.3	0.4	0.6	0.8	1.0	1.2	1.5	1.8	2.1	2.5	2.9
20	0.1	0.3	0.4	0.5	0.7	0.9	1.1	1.4	1.7	2.0	2.3	2.6
25	0.1	0.2	0.3	0.5	0.6	0.8	1.0	1.2	1.4	1.7	2.0	2.3
30	0.1	0.2	0.3	0.4	0.6	0.7	0.9	1.1	1.3	1.5	1.7	2.0

$$s_{p,A} = \sqrt{\frac{1}{N-1} \sum_{n=1}^N (L_{p,A,0qT,n} - \bar{L}_{p,A,0qT})^2} \quad (.12)$$

$i_{p,A,eq7} >$

r_{10}

\wedge N

$*7$

N

4, 3,5 (

),

{ .10.4).

1 —

$N \gg 3$ $N - 4$

(. 4).

2 —

$L_{p,A,c4Tjt}$

$L_{p,A,c<Tn(rw)}$

• . , » . <) ^ < | » 1)

1/1" «

- 22 ZV<6.
- 25: We (6.15),
- 3.0 We (16. 30].

.4

(.9)

.4

2 3

.5 .6

.5

{ u_{2T}

),

.5

.5—

2

	$\llcorner_{/2}(\llcorner 2 >$
1 IEC 61672	0.7
no SEC 61252	1.5
2 no IEC 61672	1.5

1—

.5,

1~

2 —

2 (u_{2jr} .

.5,

IEC 61672-1 (61252

.5.

.6

—
\$.

2
1

12.3 12.4).

()

8-

D.1 1.

- a) ():
- b) , () ;
- c) ():
- d) ():
- e) ,

).

1 2

(

4 6

:0.5

1

D.1.

0.2 2.

D.1—

()	1.5
	1.5
	5
—	

0.3 3.

() 70 ()

$L_p \times \text{ref}^{148}$

—

4

9.3

5

7

5

$$L_{pA,eqT2} = 80.1 \quad ; \quad L_{pA,eqT2} = 82.2 \quad ; \quad L_{pA,eqT2} = 79.6$$

$$() : 1_{91} = 86.5 \quad ; \quad t_{pAcqT32} = 924 \quad ; \quad L_{p,A} * qT.3i = 093$$

3

$$L_{pA} * j_i : 34 = 93.2 \quad - \quad L_{pA,eqT.3S} = 07.8 \quad ; \quad L_{pA,eq7M} = 86.2$$

D.4 4.

D.5 5.

D.5.1

8-

(7).

$$V_{-0T.2} \wedge [\wedge (IO^{011} * 0_{-1} + 10^{00} \ll -3 + 1^{* > -1} 96)] = 80.8$$

$$L_{-A,eqj} : 3 = 90.1$$

$$L_{p,A} = 70$$

8-

(8).
a)

$$i * x * M = TM + 10 \lg(\wedge) = 6Z7$$

b)

$$\epsilon = 80.8 + 1 \quad (\parallel) = 78.8$$

c)

$$W2 = \textcircled{0} - 1 + 1^{\circ} s(-1^{\wedge}) = e2.8$$

$$8- \quad (10)$$

$$= 1 \quad 1 \quad (1 \quad , \quad -7, \quad 1 \quad -7 \quad + \quad 1 \quad 0 \quad . \quad -) = 84.3$$

D.5.2

(.)

$$= \wedge 2^{\wedge} [(-0.5)^2 * (1.6) + (-1.0)^3] = 0.8$$

13 « 1.2

'3

no 1 61252.

$$2^{\wedge} \quad .5. \quad 1.5$$

1.0

(4).

:

$$k_8 = 10^{-0.3} = 0.007 - 0.$$

:

$$k_1 = 1.2 \cdot \frac{5}{8} = 0.75$$

:

$$k_{L_{EX}} = 0.71$$

8-

(.)

$$L_{EX} = 0.28^2 \cdot (0.8^2 + 1.5^2 + 1.0^2) + 0.71^2 \cdot (1.2^2 + 1.5^2 + 1.0^2) = 2.67$$

$$k_{L_{EX}} = 1.63$$

(.7)

:

-

(.5)

$$k_2 = 4.34 \cdot \frac{5}{8} = 0.24$$

0.5 .

$$k_1 = 2.1$$

$$L_{EX} = 0.28^2 \cdot (0.8^2 + 1.5^2 + 1.0^2) + 0.71^2 \cdot (1.2^2 + 1.5^2 + 1.0^2) + (0.24 \cdot 1.0)^2 + (2.1 \cdot 0.5)^2 = 3.83$$

$$k_{L_{EX}} = 1.95$$

D.5.3

8-

84.3

1.63

1,95

()

8-

.1

.2 1.

(

7.5 .

. 2.

.4 3.

-
-

1 10,75 ;

a)

b) 8 05:00 13:00 13:00 21:00.

- 1. 10:00 12:00 10:30 12:30;
- 2. 8:00 10:00 8:30 10:30;
- 2. 14:00 16:00 18:00 20:00.

88.1; 86.1; 89.7; 86.5; 91.1; L_{T_0} 86.7; $L_{T_{Cpeak}}$ 137 .

E.S 4.

.6 5.

.6.1

8-

{ (11)

$$L_{p,A,eqT_0} = 10 \lg \left(\frac{1}{N} \sum_{n=1}^N 10^{0.1 \times L_{p,A,eqT,n}} \right) = 88.4 \text{ дБ.}$$

2.0 (. (.12) ()].

.4 W=6 ,=2.0 :00)=1,4 .

cj= 3=1.

()
 $3 \cdot 1.0$.
 (.9)

$$\Delta_{\text{cor}} \approx 1.4^2 + 1.5^2 + 1.0^2 = 5.21 \text{ dB}$$

$$\Delta_{\text{cor}} = 2.3 \text{ dB}$$

.6.2
 $L_{\text{OA}} \approx 88.4$
 (13)

$$L_{\text{EX,8h}} = L_{\text{p,A,eq,T_0}} + 10 \lg \left(\frac{T_e}{T_0} \right) = 88.1 \text{ dB}$$

.6.3
 88.1
 8-
 2.3

(F)

8-

F.1

(11)

8-

F.2 1.

()

20.45 20

10

.925

(.72).

F.3 2.

F.4 3.

F.4.1

F.4.2

F.5 4.

F.6 5.

F.6.1

F.1.

F.1—

1/1	88.0	8 15
2/1	91.8	8 10
3/1	87,6	8 15
1/2	90.4	8 00
2/2	89.0	8 05
3/2	88.4	8 10

F.6.2

6-

9.25

(11)

\hat{A}_{eg}^{CM}

F.1).

$$\hat{A}_{eg} = 89.5$$

(13)

8-

$$* = 89.5 + 10 \operatorname{tg}(-5^\circ) = 90.1$$

F.6.3

U

(.12)

\hat{p}_{AegFe}

$$-2.7^2 + (-1.6)^2 + 1.2^2 + (-0.8)^2 = 1.65$$

.4

$$W = 6, = 1.65$$

$$, = 1.0$$

$$= 1.5$$

(

).

.6

3 1.0 .

$$2 = 3 = 1.$$

(.9)

$$= 1.2 + 1.52 + 1.02 = 4.25$$

$$s = 2.06$$

F.6.4

8-

90.1

2.06 .

()

*2

.1

ISO 1999	—	«
ISO/IEC Guide 98-3	—)
IEC 60942:2003	—	•.2)
SEC 61252	—	•
« 61672-1	MOD	17187—2010 (IEC 61672-1: 2002) « . 1. »
*		-
“		-
		-
•MOD—		-

^

54500.3—2011 «

3.

»,

2)

60942—2009 «

».

- (1) ISO 4869*2. Acoustics — Hearing protectors — Part 2: Estimation of effective A -weighted sound pressure levels when hearing protectors are worn
- (2) ISO 11200. Acoustics — Noise emitted by machinery and equipment — Guidelines for the use of basic standards for the determination of emission sound pressure levels at a work station and at other specified positions
- (3) ISO 11201. Acoustics — Noise emitted by machinery and equipment — Measurement of emission sound pressure levels at a work station and at other specified positions in an essentially free field over a reflecting plane with negligible environmental corrections
- (4) ISO 11202. Acoustics — Noise emitted by machinery and equipment — Measurement of emission sound pressure levels at a work station and at other specified positions applying approximate environmental corrections
- (5) ISO 11203. Acoustics — Noise emitted by machinery and equipment — Determination of emission sound pressure levels at a work station and at other specified positions from the sound power level
- (6) ISO 11205. Acoustics — Noise emitted by machinery and equipment — Engineering method for the determination of emission sound pressure levels in situ at the work station and at other specified positions using sound intensity
- (7) ISO 11904-1. Acoustics — Determination of sound immission from sound sources placed close to the ear — Part 1: Technique using a microphone in a real ear (MIRE technique)
- (8) ISO 11904*2. Acoustics — Determination of sound immission from sound sources placed close to the ear — Part 2: Technique using a manikin
- (9) ISO/TR 25417:2007. Acoustics — Definitions of basic quantities and terms
- (10) EN 458:2004. Hearing protectors — Recommendations for selection, use, care and maintenance — Guidance document
- (11) GRZEBYK. M., THIERY. L. Confidence intervals for the mean of sound exposure levels. *Am. Indust Hyg. Assoc. J.* 2003.64, pp 640*645
- (12) THIERY. L., OGNEDAL. T. Note about the statistical background of the methods used in ISO/DIS 9612 to estimate the uncertainty of occupational noise exposure measurements. *Acta Acust. Acust.* 2008.94, pp 331*334

534.322.3.08:656.382.3:006.354

13.140

58

8- : . , , ,

26.10.2016. 09.11.2016. 60*6414
. . . 6.12. . . . 4.63. 57 . . 2766.

« . . . » 12399S . . . 4.
www.gosetinfo.ru info@gosbnfo.ru

Федеральное агентство
по техническому регулированию
и метрологии

Федеральное агентство
по техническому регулированию
и метрологии

Федеральное агентство
по техническому регулированию
и метрологии